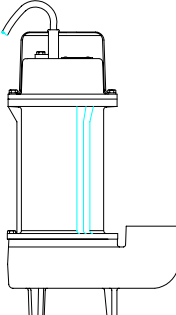
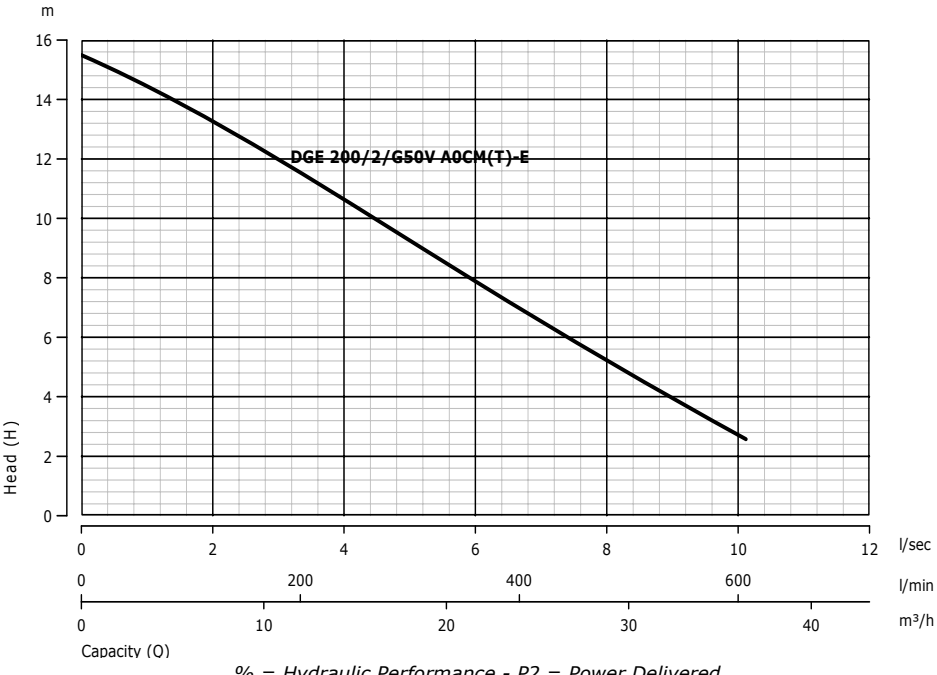


<h1>DGE 200/2/G50V A0CM-E</h1>	Hydraulic model: <b>"A"</b>	
<div style="display: flex;"> <div style="flex: 1;">  <p style="text-align: center;">DGE 200/2/G50V A0CM(T)-E</p> <p style="text-align: center;">% = Hydraulic Performance - P2 = Power Delivered</p> </div> <div style="flex: 0.5; font-size: small; padding-left: 10px;">             l/sec l/min m³/h         </div> </div>		<b>ACTUAL OUTLINE</b>
		<b>Hydraulic type:</b>
		Vortex set-back impeller*
		<b>Power/poles:</b>
		1,5 kW - 2 Poles
		<b>Outlet type:</b>
		2" vertical gas threaded opening
		<b>Explosion-proof:</b>
		Pump in NOT ex-proof version
		<b>Free passage of solid bodies:</b>
		Max 38 mm


<b>ELECTRO-MECHANICAL UNIT</b>	Rated delivered power:	1,5 kW	Motor poles/revolutions:	2900 1/min - 2Poles	
	Rated absorbed power:	2,06 kW	Motor phases:	M - Single-phase	
	Rated absorbed current:	9,3 A	Service:	S1 submersible or w/sleeve	
	Starting current:	Not available	Motor protection:	IP 68	
	Starting torque:	Not available	Insulation class (ICL):	F	
	Rated Cos Ø:	0,96	Max. Starts per hour:	20	
	Rated motor performance:	73%	Standard cable type:	5 mt-H07RN-F 3G1	
	Detailed description of series:	Submersible pumps consisting of a EN-GJL-250 cast iron electromechanical unit intended for submersible operation with 1 mechanical seal and 1 lip seal conventionally installed. Explosion-proof version not available.*			
	Standard mechanical seals	1 mechanical graphite alumina (NBR) seal and 1 lip seal			
	Lifting:	With handle on motor cover			
Ball bearings:	Upper and lower permanently lubricated ball bearings				
Winding type:	Induction motor with dry winding and automatic overload protection				
Impregnation type:	Doubly impregnated humidity-resistant winding				
Direction of rotation:	Clockwise seen from top of electric pump				
Data provided above refers to hydraulic tests carried out at: 230 Volt 50 Hz					

<b>MATERIALS</b>	<b>Mechanical unit:</b>	EN-GJL-250 cast iron	<b>Hyd. Unit, impeller:</b>	EN-GJL-250 cast iron
	<b>Shaft:</b>	X30Cr13 (AISI420) steel	<b>Bolts and Screws:</b>	INOX A2 steel
	<b>Seals (O-Ring):</b>	NBR-SBR rubber	<b>Grinder cutter:</b>	Not applicable
	<b>**Cooling jacket:</b>	Not applicable	<b>Painting:</b>	Ecological epoxy vinyl
** Cooling jacket supplied upon request in series specified				


<b>LIMITS ON USE REFERENCE STANDARDS</b>	<b>Max. operating temp.:</b>	40 °C	<b>Max. sub. depth:</b>	20 m
	<b>Liquid PH:</b>	6 to 10	<b>Liquid density:</b>	1 kg/dm³
	<b>Viscosity of liquid:</b>	1 mm²/s	<b>Max. acoustic press.:</b>	< 70 dB dB
	<b>Reference standards:</b>			
	<ul style="list-style-type: none"> <li>• EN 292-1; EN 292-2; CEI EN 60529; ISO 9906; CEI EN 60034-1.</li> <li>• CEI EN 60204; UNI ISO 6009; UNI EN 1561-1563; UNI EN 10098.</li> <li>• Low voltage directive 73/23/CEE.</li> <li>• Procedures specified by Zenit S.p.a. Quality System, UNI EN ISO 9001 (ISO 9001) certified, DNV n. SQ 0660-IT certified.</li> <li>• Machines directive 89/392/CEE and successive amendments thereto (directives 91/368/CEE, 93/68/CEE), electromagnetic compatibility directive 89/336/CEE</li> </ul>			

<b>SYMBOLS</b>		Product complying with European standards in force	Company Quality System complying with UNI ISO norm
----------------	---	--	--

<b>VARIANTS AVAILABLE</b>	<b>Electrical accessories</b>	
	TC	Thermistor and capacitor
	TCG	Thermistor, capacitor and float
	<b>Set of mechanical seals</b>	
	ALM	1 mechanical graphite alumina (NBR) seal and 1 lip seal
	SICM	1 mechanical silicon carbide (Viton) seal and 1 lip seal
	<b>Cooling system / mechanical seal flushing versions*</b>	
N	No sleeve and/or seal flushing	

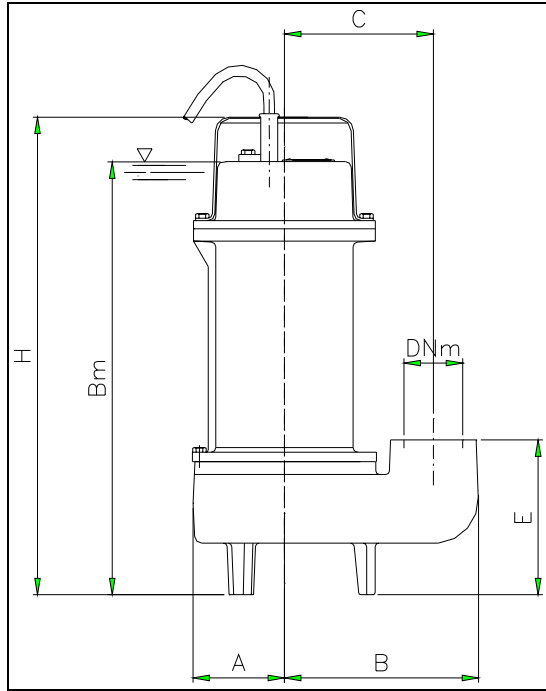

A	B	Bm	C	DNm	DNm4	E
80	166	372	127	2	2	132
EB	ED	EE	EF	EG	EP	EQ
240	2	87	98	278	70	75
ER	H	H4	L4	M4		
54	410	18	165	125		

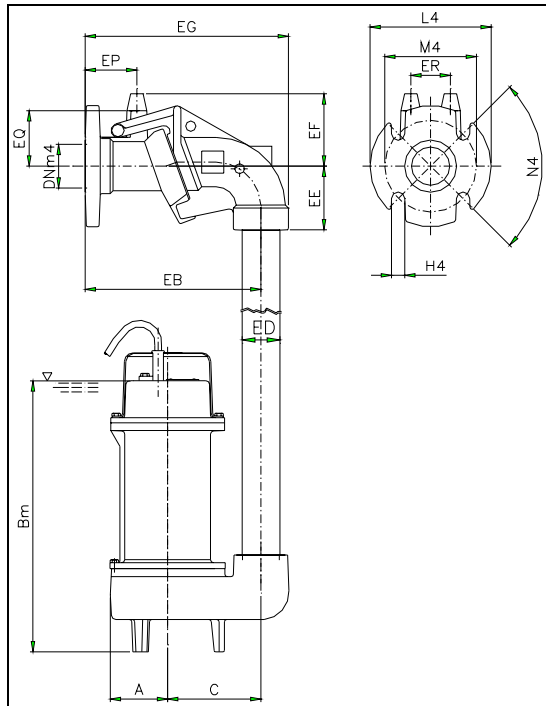

• These drawings do not represent actual product appearance. Refer to the outline on the previous page.

Dimensions 'mm' except than: DNm-inches DNm4-inches ED-inches	<b>Mass:</b> 21 Kg	<b>Possible installations:</b>	I1-I2-I3
---	--------------------	--------------------------------	----------

\*For more information see the descriptive sections

